

LUBING

STABLETEC

**PLASTIC-PADS
FOR THE PAD-
CLIMATE-SYSTEM**



➤ ADVANTAGES

- » For evaporative cooling of poultry and pig houses.
- » Excellent cooling capacity – patented design: The special layout of solid surfaces and mesh structures ensures perfect water distribution all through the Pad. This allows perfect wetting, less splashing water, and therefore excellent cooling capacity.
- » Easy to clean: The use of welded, highly resistant polymer sheets allows the Plastic-Pad to be cleaned without difficulty and without damaging the Pads.
- » Long service life: The use of polymer sheets in combination with thermal welding guarantees best stability and a long service life.
- » Lowest pressure loss: The Plastic-Pad is characterized by low pressure loss. At an air velocity of 1,5 m/s the Plastic-Pad's pressure drop is only at 10 Pa. Because of the low pressure drop the Plastic-Pad minimizes the energy consumption substantially.
- » High UV resistance: The use of UV-stabilizing additives ensures outstanding resistance to UV light for years.
- » Impermeable to light: The Plastic-Pad's geometry blocks out light.
- » Chemical resistance: The Plastic-Pad is made of Polypropylene. This material is highly resistant to most of all chemicals.

VERSIONS

Dimensions	Art. No.
500 x 600 x 150 mm	7988-0500
1000 x 600 x 150 mm	7988-1000
1500 x 600 x 150 mm	7988-1500
1800 x 600 x 150 mm	7988-1800
2000 x 600 x 150 mm	7988-2000
2200 x 600 x 150 mm	7988-2200
2400 x 600 x 150 mm	7988-2400

Other dimensions on request.




TECHNICAL DATA

EFFICIENCY AND PRESSURE DROP

Outside conditions: 32,4°C at 36,7 % RH

Inside conditions: 24,5°C at 73,0 % RH

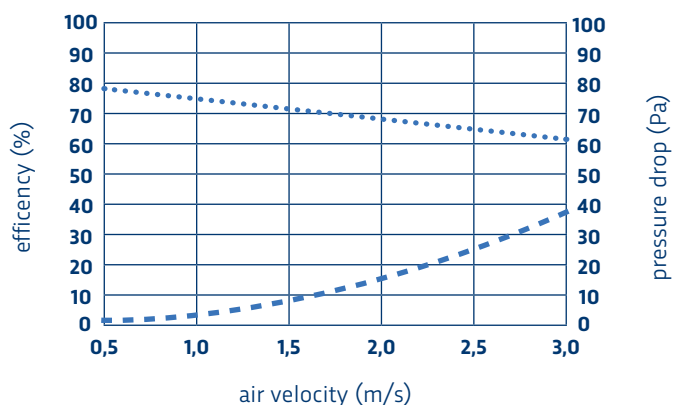

LUBING

STABLETEC

LUBING System srl
Via Marco Polo, 33 | 35011 Campodarsego
Italy

T +39 049 9202290
F +39 049 9201234
M info@lubing.it

LUBINGSYSTEM.COM

As of: May 2026 | We reserve the right to make technical changes, further developments and improvements.
No. 0849-1